

LED-LIGHT LINE

Recessed Luminaire
Aluminium
Standard/High-power/RGB

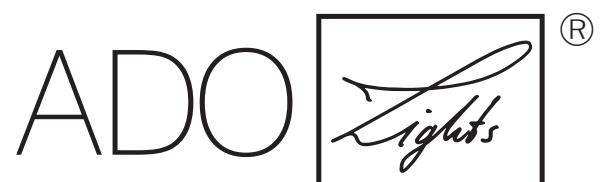

by TTC Timmler Technology


LED-LIGHT LINE AL

Recessed Luminaire | Aluminium
Standard/High-power/RGB



PICTURES

Curved and straight version

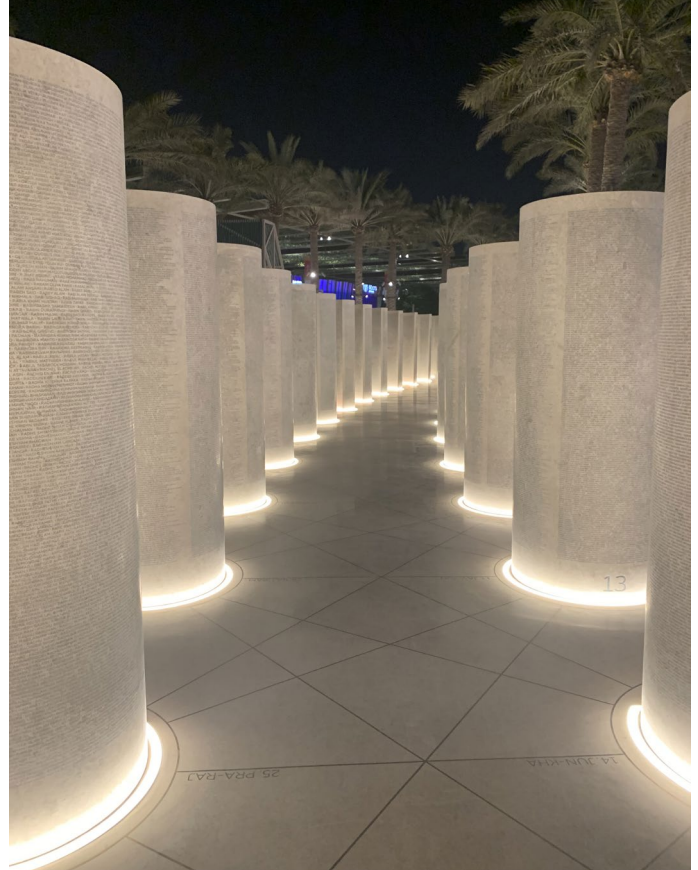

Subject to technical changes · Issued 12/2022

LED-LIGHTLINE AL

Recessed Luminaire | Aluminium
Standard/High-power/RGB



BASE INFORMATION



LED-LightLine | Eye-catcher + Signpost

Luminous lines when darkness falls. Sometimes an eye-catcher. At other times showing the way. They accentuate entrance areas or emphasize architectural contours. Lightlines can be integrated in façades and floor spaces – they are always an optical highlight.

Features

- For public spaces, façades, entrance areas
- Straight or curved versions
- Safe to walk or drive in for vehicles with air-filled tires
- Implementation in variable applications from user-friendly small applications to building automatism systems
- Perfect homogeneous lighting
- Light colours monochrome, optional standard: multicolor
- PoE-enabled



LED-LIGHT LINE AL

Recessed Luminaire | Aluminium
Standard/High-power/RGB



PICTURES
Straight version



Subject to technical changes - Issued 12/2022

LED-LIGHT LINE AL

Recessed Luminaire | Aluminium

Standard/High-power/RGB



GENERAL TECHNICAL SPECIFICATIONS



DIMENSIONS [W X H] 12 x 30 mm | Rectangular profile

POWER CONSUMPTION STANDARD:
19.2 W/m | 14.4 W/m [RGB]
HIGH-POWER:
38 W/m

LUMINOUS FLUX STANDARD:
Module efficiency 75 lm/W
Luminous flux 450 lm
Nominal luminous flux 1,280 lm
HIGH-POWER:
Module efficiency 100 lm/W
Luminous flux 1,160 lm
Nominal luminous flux 3,320 lm

SERVICE LIFE LED and EVG 50.000 hours at
70% of mean luminous flux

COLOUR TEMPERATURE STANDARD:
White | 2,700/3,000/3,500/4,000 Kelvin
optional RGB pixel controlled
HIGH-POWER:
White | 2,700/3,000/3,500/4,000 Kelvin

CRI CRI > 85

CONTROL INTERFACE with ballast compatible to any interface
as i.e. DMX512, DALI, EIB etc.

IP RATING IP68

CERTIFICATES CE, RoHs

LUMINAIRE HOUSING Aluminium anodised

COVER High-quality, opaque polyurethane seal
Optionally black casting + black profile
(other colors on request)

OTHER Ambient temperature -25 °C up to +50 °C
Connection cable with plug connection
IP67 suitable for mounting in the ground,
Mounting profile made of aluminium or
stainless steel
PoE-enabled

WEIGHT 0.75 kg/m





LED-LIGHT LINE AL

Recessed Luminaire | Aluminium

Standard/High-power/RGB



TECHNICAL DRAWINGS | PICTURES

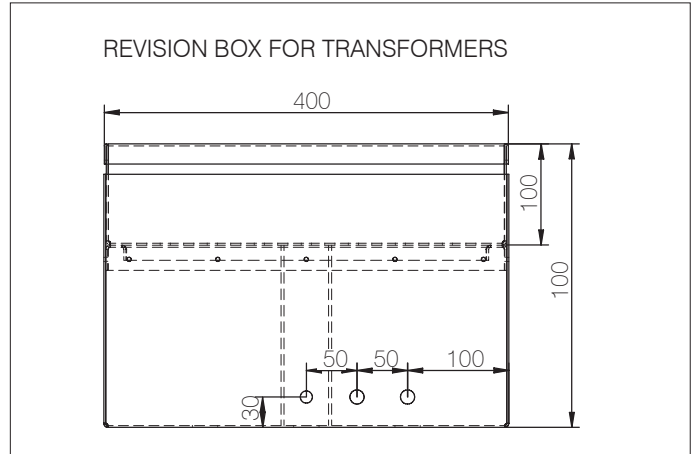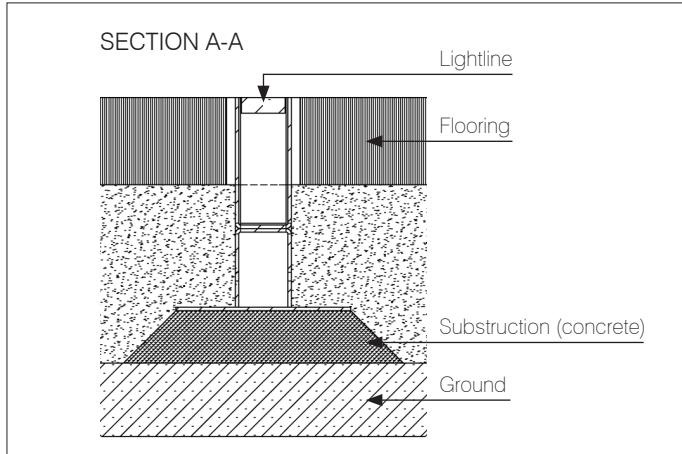






Subject to technical changes · Issued 12/2022

LED-LIGHTLINE AL

Recessed Luminaire | Aluminium
Standard/High-power/RGB




TECHNICAL DRAWINGS | SUB-CONSTRUCTIONS

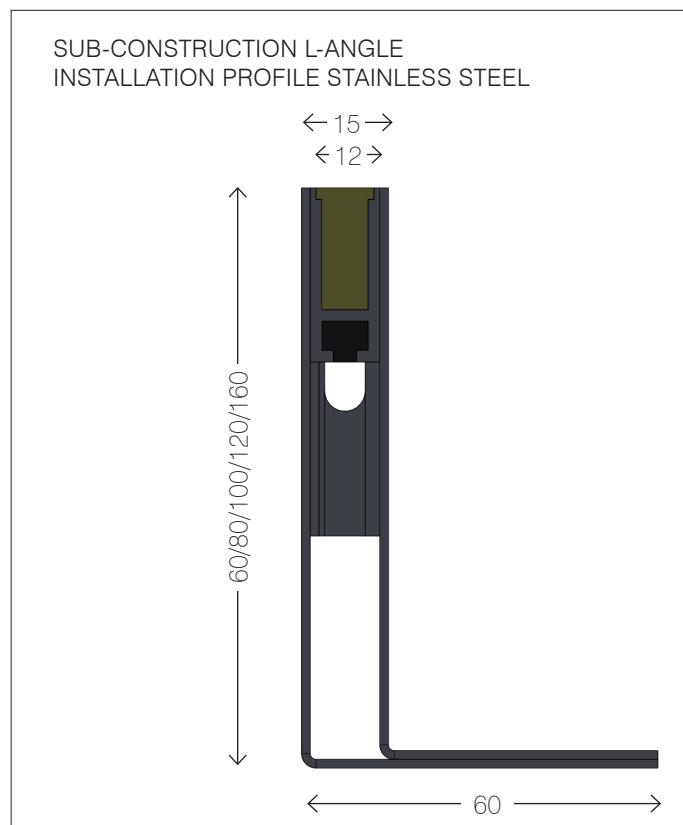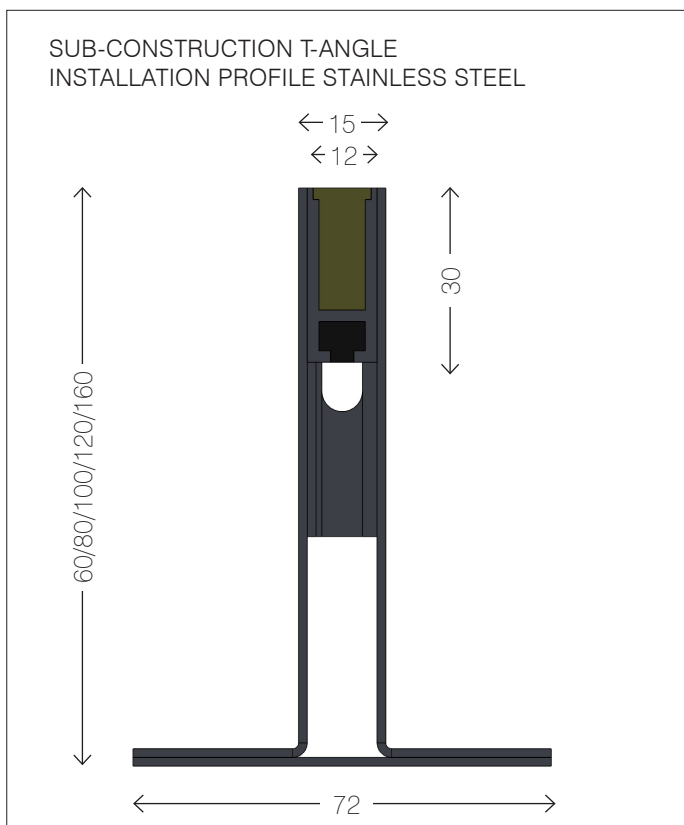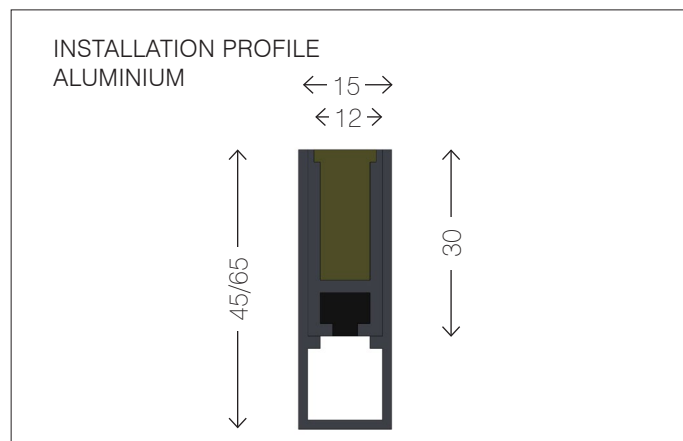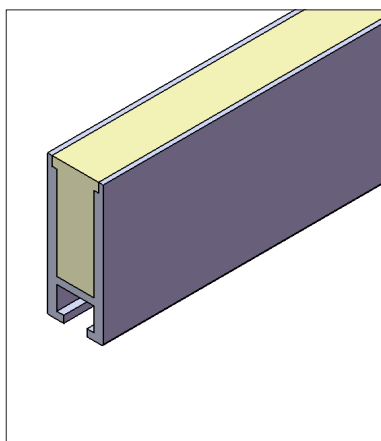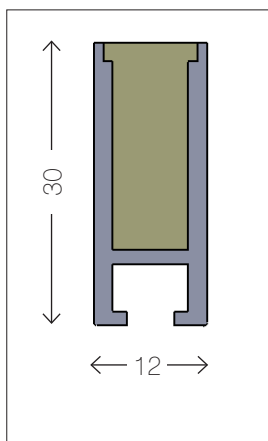

Subject to technical changes · Issued 12/2022

TTC Timmler Technology GmbH
Christian-Schäfer-Straße 8
D-53881 Flammersheim [Cologne/Bonn]
T +49 2255 9212-00
F +49 2255 9212-99
E info@ado-lights.com
I www.ado-lights.com
www.led-luc.com

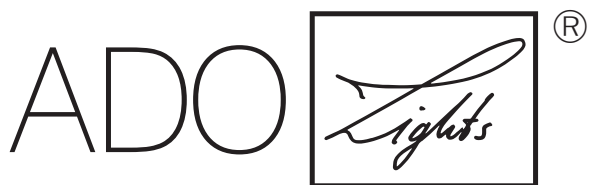

by TTC Timmler Technology

