
PROJECT

Fair review
LIGHT22, London

WELCOME

ADO Lights at LIGHT22

What's new

After a long time with little opportunities to meet in person, LIGHT22 in London was the perfect place for a reunion of the international lighting community.

»Sustainable wherever we are« was our motto for the fair and this applied to our fully modular stand, which follows the same sustainability philosophy as our luminaires: completely dismountable, separable and thus recyclable if needed.

A big thanks to everyone who stopped by – whether it was to get creative with our magnetic LED Flow or just to learn about our portfolio and toast with us. So our visitors were able to experience not only the quality of German beer but above all of German products, design and recent innovations.

These sustainable luminaires were presented at LIGHT22:

→ LED Flow M side bend

→ LED Lightline 20.40 br
LED Lightline 12.30

→ LED Gallago WW
LED Gallago LG

→ LED Linargo BL

→ LED Luc 40 Zoom

More information about our products on adolights.de



FAIR REVIEW

LiGHT22 in London

PRODUCTS SHOWN AT LIGHT22

Technical specification



Wall on the right side

LED FLOW M, SIDE BEND

- Magnetic flexible lightline, 16 x 16 mm, 1200 mm length, with black steel board
- RGB, 14.4 W/m, 24VDC Casambi controlled

LED LIGHTLINE 20.40 BR

- Lightline in aluminium profile 20 x 40 mm with black resin to blend with the background when off
- RGB pixel controlled, 455 lm/m, 15 W/m, 24VDC

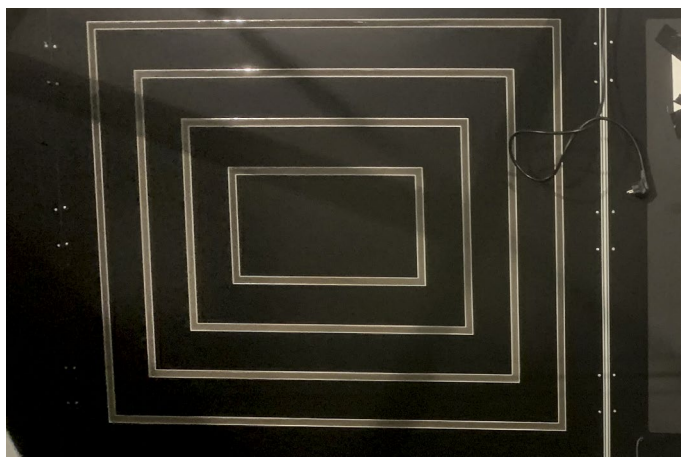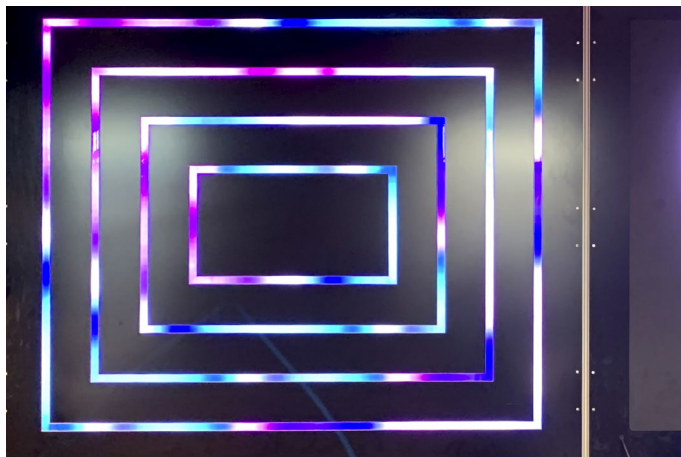

PRODUCTS SHOWN AT LIGHT22

Technical specification

Wall on the left side + Suspended

LED GALLAGO WW


- Surface mounted wallwasher, black anodized aluminium profile, 27 x 27 mm
- 25° asymmetrical beam angle, 4000 K, CRI > 90, 11.8 W/m, 980 lm/m

LED GALLAGO LG

- Low glare pendant luminaire, black anodized aluminium profile, 27 x 27 mm, with black raster and lens
- 30° beam angle, UGR < 17, CRI > 90, 29 W/m, 3412 lm/m

LED LINARGO BL

- Pendant luminaire with acoustic baffle, aluminium profile 30 x 220 mm, with diffuse pmma
- 144 lm/m, 38 W/m, DALI dimmable

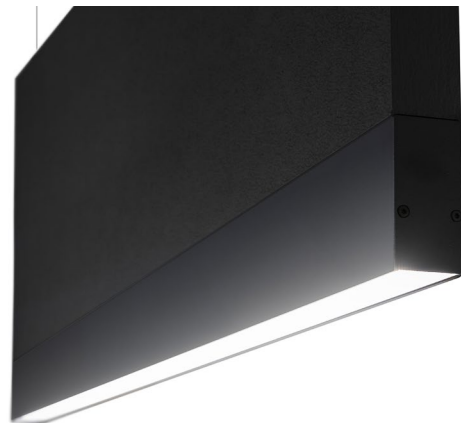

PRODUCTS SHOWN AT LiGHT22

Technical specification


Hand samples

LED LUC 40 ZOOM


- Magnetic minispot, freely swivelling on bullet magnet, aluminium housing, 40 x 70 mm
- 4000 K, 9 W, CRI > 90, 18–50° adjustable beam angle

LED LIGHTLINE 12.30

- Lightline in aluminium profile 12 x 30 mm straight/curved
- 4000 K, 19.2 W/m

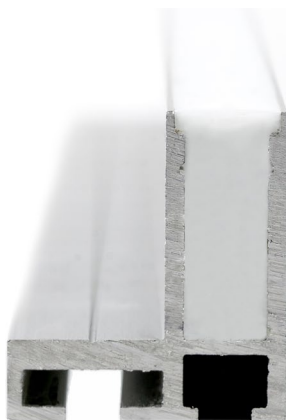

TTC Timmler Technology GmbH
Christian-Schäfer-Straße 8
D-53881 Flammersheim [Cologne/Bonn]
T +49 2255 9212-00
F +49 2255 9212-99
E info@ado-lights.com
I www.ado-lights.com
www.led-luc.com

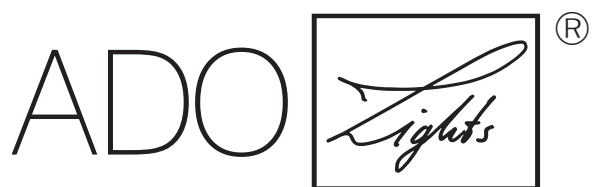

by TTC Timmler Technology

